


# Model 6000-VFG-3



## Model 6000-VFG-3

Out of the individual air inlet valve 6000-VFG we build complex units for tunnel ventilation. For that, there where necessary, we leave off the upper or bottom flange and the inlets can be put together by means of positioning pins. Further details are identical to the specifications of the air inlet valve 6000-VFG so they are equipped with curved inner flap and stainless steel side arms. This unit, in this case built together out of 3 elements can be controlled by means of a special connection set.

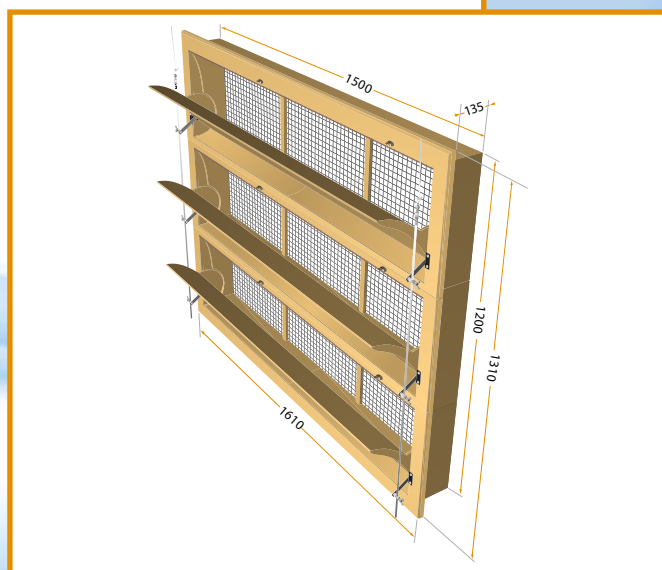

Capacity in m<sup>3</sup>/hour at static pressure of:

MODEL	10Pa	25Pa	40Pa
6000-VFG-3	17400	26250	34800

Installation dimensions

1500 x 1200 mm



Member of SP Group A/S

### TPI-Polytechniek BV

De Steenbok 24  
5215 ME 's-Hertogenbosch  
The Netherlands

Phone: +31 (0)73-656 91 94  
Fax: +31 (0)73-656 69 33

E-mail: [info@tpi-polytechniek.com](mailto:info@tpi-polytechniek.com)  
Internet: [www.tpi-polytechniek.com](http://www.tpi-polytechniek.com)